

CARATTERISTICHE TECNICHE - SPIRALI IN POLIURETANO CON TERMINALI DIRITTI E RACCORDI

TECHNICAL SPECIFICATIONS - POLYURETHANE SPIRAL HOSES WITH STRAIGHT TERMINALS AND FITTINGS

Codice Code	LUNGHEZZA LENGTH						5 m		7,5 m			10 m			15 m			
	D mm	d mm	De mm	Di mm	Lt1 mm	Lt2 mm	Lc1 mm	Lc2 mm	La1 mm	Lc1 mm	Lc2 mm	La1 mm	Lc1 mm	Lc2 mm	La1 mm	Lc1 mm	Lc2 mm	La1 mm
SPCR64BY	6	4	42	30	150	150	250	550	2500	380	680	3750	515	815	5000	780	1080	7500
SPCR85BY	8	5	46	30	150	150	315	615	2500	480	780	3750	650	950	5000	980	1280	7500
SPCR1065BY	10	6,5	60	40	150	150	300	600	2500	460	760	3750	620	920	5000	940	1240	7500
SPCR128BY	12	8	84	60	150	150	250	550	2500	385	685	3750	515	815	5000	780	1080	7500
SPCR1610BY	16	10	92	60	150	150	315	615	2500	485	785	3750	655	955	5000	990	1290	7500

6 x 4: maschio girevole 1/4"

8 x 5: maschio girevole 1/4"

10 x 6,5: maschio girevole 1/4"

12 x 8: maschio girevole 3/8"

16 x 10: maschio girevole 1/2"


6 x 4: 1/4" rotating male

8 x 5: 1/4" rotating male

10 x 6,5: 1/4" rotating male

12 x 8: 3/8" rotating male

16 x 10: 1/2" rotating male

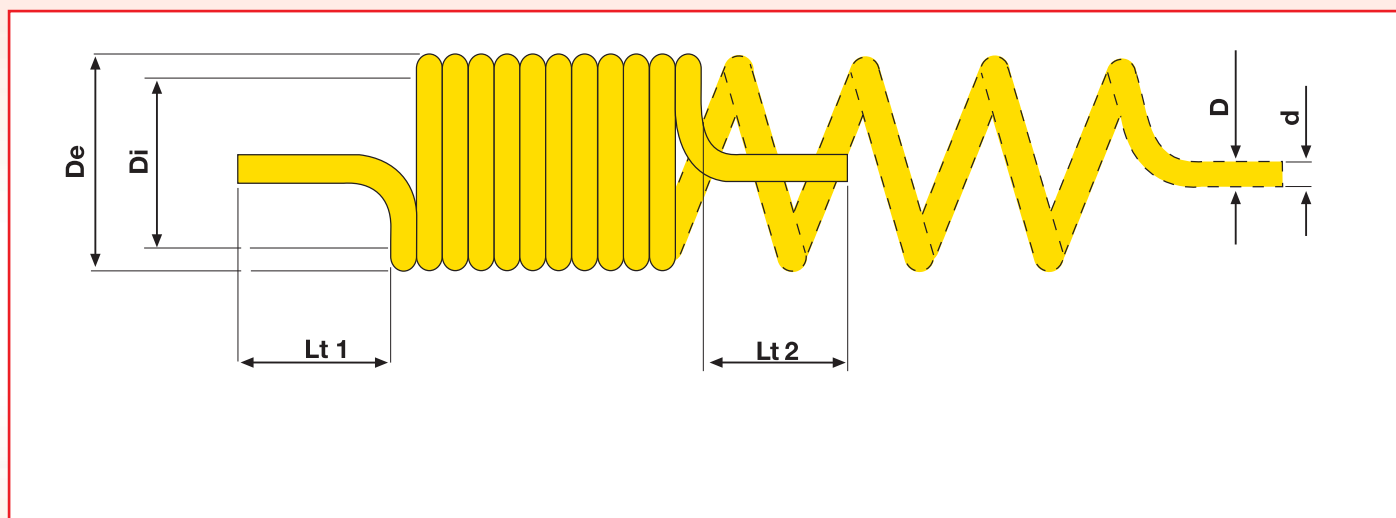

CARATTERISTICHE TECNICHE - SPIRALI IN POLIURETANO CON TERMINALI DIRITTI

TECHNICAL SPECIFICATIONS - POLYURETHANE SPIRALS WITH STRAIGHT TERMINALS

Codice Code	LUNGHEZZA LENGTH						5 m		7,5 m			10 m			15 m			
	D mm	d mm	De mm	Di mm	Lt1 mm	Lt2 mm	Lc1 mm	Lc2 mm	La1 mm	Lc1 mm	Lc2 mm	La1 mm	Lc1 mm	Lc2 mm	La1 mm	Lc1 mm	Lc2 mm	La1 mm
SPC64BY	6	4	42	30	150	150	250	550	2500	380	680	3750	515	815	5000	780	1080	7500
SPC85BY	8	5	46	30	150	150	315	615	2500	480	780	3750	650	950	5000	980	1280	7500
SPC1065BY	10	6,5	60	40	150	150	300	600	2500	460	760	3750	620	920	5000	940	1240	7500
SPC128BY	12	8	84	60	150	150	250	550	2500	385	685	3750	515	815	5000	780	1080	7500
SPC1610BY	16	10	92	60	150	150	315	615	2500	485	785	3750	655	955	5000	990	1290	7500

Queste spirali sono previste nel colore BLU (B), a richiesta altri colori.

Nel codice compare una Y, che corrisponde alla lunghezza della spirale.

ESEMPIO CODICE: SPC1065B10 - Spirale POLIURETANO con codoli 10x6,5 BLU da 10 m.

Temperature di utilizzo: da -20°C a +60°C.

PRESSIONI: Pressioni di esercizio e scoppio come da scheda tecnica tubo corrispondente.

This spirals are available only in BLUE (B), or other colours on request.

In the code there is an Y, which corresponds to the length of the spiral.

CODE EXAMPLE: SPC1065B10 - Spirale POLYURETHANE 10x6,5 with straight terminals BLUE in lengths of 10 m.

Working temperature: from -20°C to +60°C.

PRESSURES: Working and bursting pressures as per the corresponding tube technical specification sheet.

