


# CARATTERISTICHE TECNICHE - SPIRALI IN RILSAN® PA11 CON TERMINALI DIRITTI

## TECHNICAL SPECIFICATIONS - RILSAN® PA11 SPIRALS WITH STRAIGHT TERMINALS

Codice Code	LUNGHEZZA LENGTH						5 m			7,5 m			10 m			12 m			15 m			30 m		
	D mm	d mm	De mm	Di mm	Lt1 mm	Lt2 mm	Lc1 mm	Lc2 mm	La1 mm	Lc1 mm	Lc2 mm	La1 mm	Lc1 mm	Lc2 mm	La1 mm	Lc1 mm	Lc2 mm	La1 mm	Lc1 mm	Lc2 mm	La1 mm	Lc1 mm	Lc2 mm	La1 mm
SC42XY	4	2	50	42	100	100	120	320	2500	190	390	3750	258	458	5000	313	513	6000	395	595	7500	805	1005	15000
SC425XY	4	2,5	50	42	100	100	120	320	2500	190	390	3750	258	458	5000	313	513	6000	395	595	7500	805	1005	15000
SC427XY	4	2,7	50	42	100	100	120	320	2500	190	390	3750	258	458	5000	313	513	6000	395	595	7500	805	1005	15000
SC53XY	5	3	62	52	100	100	125	325	2500	197	397	3750	270	470	5000	328	528	6000	415	615	7500	850	1050	15000
SC64XY	6	4	64	52	100	100	146	346	2500	230	430	3750	313	513	5000	380	580	6000	480	680	7500	980	1180	15000
SC86XY	8	6	86	70	100	100	146	346	2500	230	430	3750	313	513	5000	380	580	6000	480	680	7500	980	1180	15000
SC108XY	10	8	102	82	100	100	155	355	2500	242	442	3750	330	530	5000	400	600	6000	505	705	7500	1030	1230	15000
SC1210XY	12	10	126	102	100	100	155	355	2500	242	442	3750	330	530	5000	400	600	6000	505	705	7500	1030	1230	15000
SC1512XY	15	12	182	152	100	100	120	320	2500	195	395	3750	270	470	5000	330	530	6000	420	620	7500	870	1070	15000
SC15125XY	15	12,5	182	152	100	100	120	320	2500	195	395	3750	270	470	5000	330	530	6000	420	620	7500	870	1070	15000
SC1815XY	18	15	188	152	100	100	120	320	2500	200	400	3750	280	480	5000	344	544	6000	440	640	7500	920	1120	15000

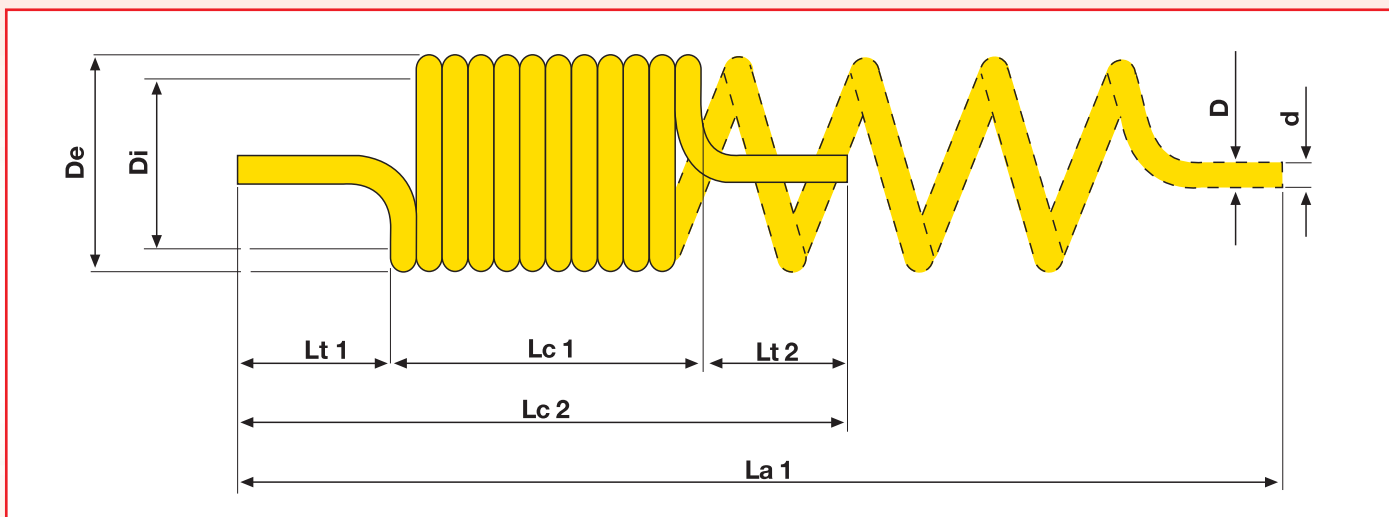

**NB:** Nel codice compare una X, bisogna sostituirla con la lettera del colore desiderato: BLU (B), ed ARANCIO (A), a richiesta altri colori; ed una Y, che corrisponde alla lunghezza della spirale.

**ESEMPIO CODICE:** SC1210A15 - Spirale RILSAN® PA11 con codoli 12x10 ARANCIO da 15 m.

Temperature di utilizzo: da -40°C a +80°C.

Per fluidi a base acquosa temperatura massima di esercizio +65°

**PRESSIONI:** Pressioni di esercizio e scoppio come da scheda tecnica tubo corrispondente.

**NB:** There is an X in the code. This should be replaced with the letter representing the colour required: BLUE (B), and ORANGE (A), with other colours on request; and a Y, which corresponds to the length of the spiral.

**CODE EXAMPLE:** SC1210A15 - RILSAN® PA11 Spiral with straight terminals 12x10 ORANGE in lengths of 15 m.

Working temperature: from -40°C to +80°C.

Max. working temperature of fluids containing water +65°C

**PRESSURES:** Working and bursting pressures as per the corresponding tube technical specification sheet.

