


Fondello Bombato

Norme: EN 10253-3
 Materiale: AISI 316L / W. 1.4404

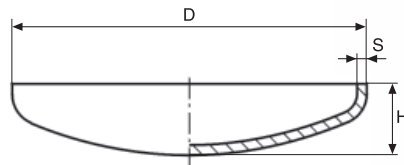

Codice	DN	DN (mm)	D (mm)	S (mm)	H (mm)	Peso (gr)
800213316	15	1/2"	21/1	2	15	20
800269316	20	3/4"	26/1	2	14	30
800337316	25	1"	2/2	2	17	50
800424316	32	1"1/4	42,4	2	19	70
800483316	40	1"1/2	48,3	2	20	90
800603316	50	2"	29/2	2	22	150
800761316	65	2"1/2	76,1	2	25	220
800889316	80	3"	28/3	2	28	290
800101316	90	3"1/2	101,6	2	25	225
800108316	-	-	17/4	2	30	248
800114316	100	4"	23/4	2	31	270
800139316	125	5"	18/5	2	35	650
800168316	150	6"	16/6	2	40	900
800219316	200	8"	6/8	2	50	1200
800273316	250	10"	29/9	2	60	1200
800324316	300	12"	18/11	2	72	2200

Tolleranze dimensionali: S = +/-12,5% dello spessore nominale

D1 = ±1% con un minimo di 0,5 mm

H = ±2 mm fino a 114,3 mm (4")

H = ±3 mm da 139,7÷273 mm (5"÷10")

H = ±4 mm per 323,9 mm (12")