


Intrinsically safe solenoid directional valves

on-off poppet type, leak free, direct - **ATEX** and **IECEX**

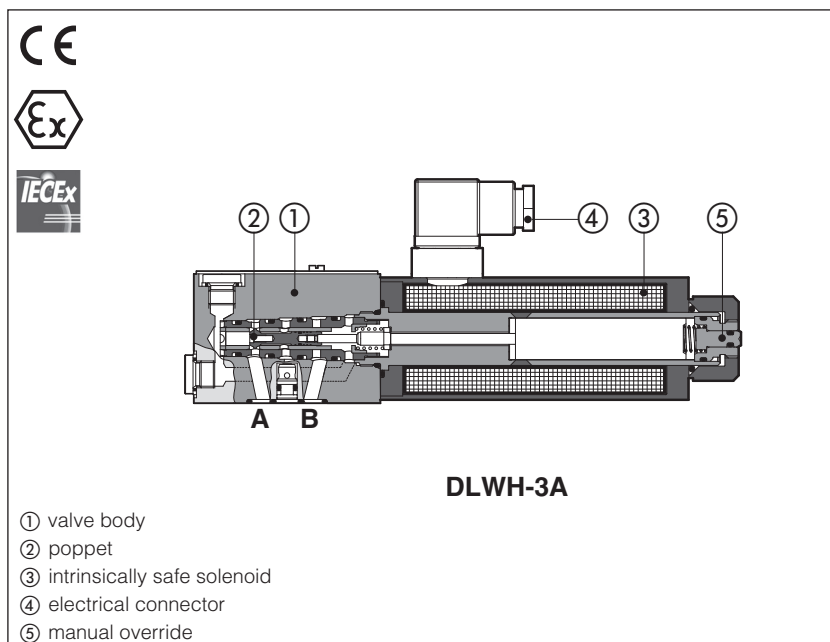

DLWH

On-off poppet type, directional valves designed for application in hydraulic systems with leak-free requirements and equipped with intrinsically safe solenoids certified for safe operation in hazardous environment with potentially explosive atmosphere.

Certifications:

- Multicertification **ATEX** and **IECEx**:
for gas group **II 1G** surface plants zone 0, 1, 2
- Multicertification **ATEX** and **IECEx**:
I M1 tunnels or mining plants

See section **7** for certification data.

The valves must be electrically powered through specific “safety barriers” limiting the max current to the solenoid, see section [12](#)

Size: **06**

Max flow: up to **12 l/min**


Max pressure: **350 bar**

1 MODEL CODE

<div>DLWH</div> <div>Intrinsically safe valve, poppet type, direct</div>	/	<div>*</div>	-	<div>2A</div>	-	<div>100</div>	/	<div>*</div>	<div><div><div>Seals material, see section 6 :</div><div>- = NBR PE = FKM BT = NBR low temp. (1)</div></div><div>Series number</div></div>
<div>Certification type:</div> <div>- = Omit for Atex Group II M = Atex Group I (mining)</div>						<div>Options (2):</div> <div>R = with check valve on port P WP = prolonged manual override</div>			
<div>Configuration:</div> <div>2A = 2 way, open in rest position 2C = 2 way, closed in rest position 3A = 3 way, A-T connection in rest position 3C = 3 way, P-B connection in rest position</div>						<div>Coil resistance:</div> <div>100 = 108 Ω 150 = 157 Ω</div>			

(1) Not for certification **M** Group I (mining)

(2) Possible combined options: all combinations are available

 The pressure at T port makes difficult the manual override operation that can be possible only if its value is lower than 50 bar

2 VALVE CONFIGURATION

<p>DLWH-2A</p>	<p>DLWH-2A/R</p>	<p>DLWH-2C</p>	<p>DLWH-2C/R</p>
<p>DLWH-3A</p>	<p>DLWH-3A/R</p>	<p>DLWH-3C</p>	<p>DLWH-3C/R</p>

3 GENERAL CHARACTERISTICS

Assembly position / location	Horizontal position only
Subplate surface finishing to ISO 4401	Acceptable roughness index, $R_a \leq 0,8$ recommended $R_a 0,4$ - flatness ratio 0,01/100
MTTFd values according to EN ISO 13849	150 years, for further details see technical table P007
Ambient temperature	Standard = $-30^{\circ}\text{C} \div +60^{\circ}\text{C}$ /PE option = $-20^{\circ}\text{C} \div +60^{\circ}\text{C}$ /BT option = $-40^{\circ}\text{C} \div +60^{\circ}\text{C}$
Storage temperature range	Standard = $-30^{\circ}\text{C} \div +80^{\circ}\text{C}$ /PE option = $-20^{\circ}\text{C} \div +80^{\circ}\text{C}$ /BT option = $-40^{\circ}\text{C} \div +80^{\circ}\text{C}$
Surface protection	Zinc coating with black passivation - salt spray test (EN ISO 9227) > 200h
Compliance	Intrinsically safe protection "Ex ia", see section 7 RoHs Directive 2011/65/EU as last update by 2015/863/EU REACH Regulation (EC) n°1907/2006

4 HYDRAULIC CHARACTERISTICS

Operating pressure	Ports P,A,B: 350 bar; Port T 160 bar
Rated flow	See Q/ Δp diagrams at section 9
Maximum flow	12 l/min , see operating limits at section 10

5 ELECTRICAL CHARACTERISTICS - see also section 7

Nominal resistance at 20°C	108 Ω	157 Ω
Coil insulation	Class H	
Minimum suggested supply current (1)	90 mA	70 mA
Protection degree	IP65; IP66/IP67 with mating connector suitable for the protection class	
Duty factor	100%	
Electrical connector	DIN 43650 2 pin+GND	

(1) Valve functional limits depend on the supply current, see section 10

In case of supply currents lower than the minimum suggested, the valves may not operate or may operate with reduced limits

6 SEALS AND HYDRAULIC FLUIDS - for other fluids not included in below table, consult our technical office

Seals, recommended fluid temperature	NBR seals (standard) = $-20^{\circ}\text{C} \div +60^{\circ}\text{C}$, with HFC hydraulic fluids = $-20^{\circ}\text{C} \div +50^{\circ}\text{C}$ FKM seals (/PE option) = $-20^{\circ}\text{C} \div +80^{\circ}\text{C}$ NBR low temp. seals (/BT option) = $-40^{\circ}\text{C} \div +60^{\circ}\text{C}$, with HFC hydraulic fluids = $-40^{\circ}\text{C} \div +50^{\circ}\text{C}$		
Recommended viscosity	15÷100 mm ² /s - max allowed range 2.8 ÷ 500 mm ² /s		
Max fluid contamination level	ISO 4406 class 20/18/15 NAS 1638 class 9, see also filter section at www.atos.com or KTF catalog		
Hydraulic fluid	Suitable seals type	Classification	Ref. Standard
Mineral oils	NBR, FKM, NBR low temp.	HL, HLP, HLPD, HVL, HVPD	DIN 51524
Flame resistant without water	FKM	HFDU, HFDR	ISO 12922
Flame resistant with water	NBR, NBR low temp.	HFC	

⚠ The ignition temperature of the hydraulic fluid must be 50°C higher than the max solenoid surface temperature

(1) Performance limitations in case of flame resistant fluids with water:

-max operating pressure = 210 bar -max fluid temperature = 50°C

7 CERTIFICATION DATA


Valve type	DLWH			DLWH/M
Certification	ATEX, IECEx (Group II)			ATEX, IECEx (Group I)
Coil code	COW-100 (108 Ω), COW-150 (157 Ω)			COW-100/M (108 Ω) COW-150/M (157 Ω)
Type examination certificate (1)	ATEX: TUV IT 22 ATEX 051X; IECEx: IECEx TPS 22.0057X;			ATEX: TUV IT 22 ATEX 051X IECEx: IECEx TPS 22.0057x
Method of protection	<ul style="list-style-type: none"> ATEX, Ex II 1G Ex ia IIC T6 Ga Ex II 1G Ex ia IIC T5 Ga IECEx Ex ia IIC T6 Ga Ex ia IIC T5 Ga 			<ul style="list-style-type: none"> ATEX, Ex I M1 Ex ia I Ma IECEx Ex ia I Ma
Temperature class	T6			T5
Electrical characteristics (max values)	Ci , Li	$\cong 0$	$\cong 0$	$\cong 0$
	Ui [V]	30V	30V	30V
	Ii [mA]	800mA	2200mA	2200mA
	Pi [W]	3W	6.82W	6.82W
Ambient temperature (2)	$-40 \div +60^{\circ}\text{C}$	$-40 \div +45^{\circ}\text{C}$	$-40 \div +60^{\circ}\text{C}$	$-40 \div +60^{\circ}\text{C}$
Applicable standards	EN 60079-0 EN 60079-11			IEC 60079-0 IEC 60079-11

(1) The type examiner certificates can be downloaded from www.atos.com

(2) In case the complete valve must withstand with minimum ambient temperature of -40°C , select **/BT** in the model code

⚠ **WARNING: service work performed on the valve by the end users or not qualified personnel invalidates the certification**


8 SOLENOIDS WIRING

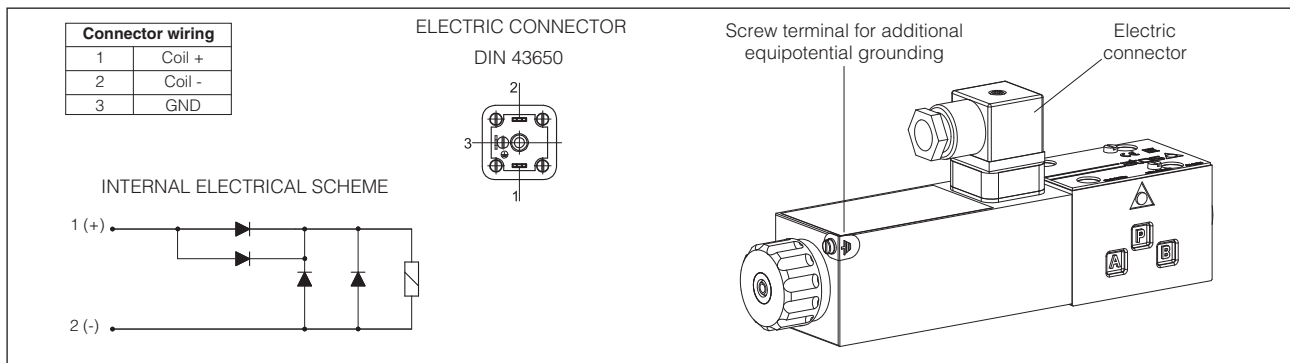

9 Q/Δp DIAGRAMS based on mineral oil ISO VG 46 at 50°C

configuration	2A	2C	3A	3C
Flow direction				
P→A / P→B (1)	1	2	4	3
A→T / B→T	-	-	5	4

(1) For two-way valves pressure drop refers to P→T

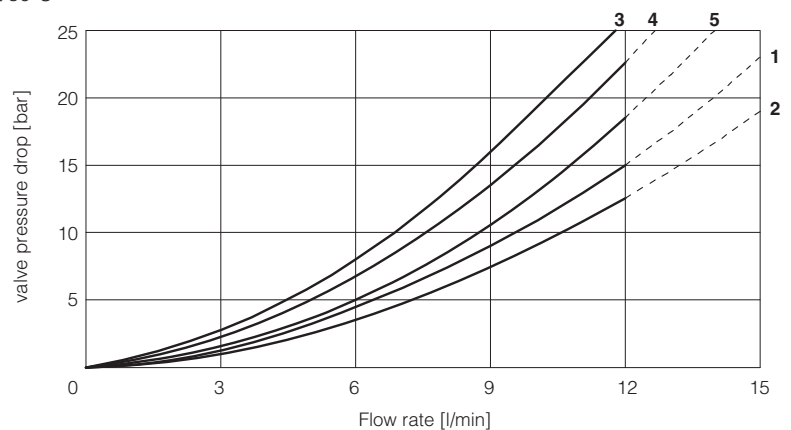


10 OPERATING LIMITS based on mineral oil ISO VG 46 at 50°C

Note: valve operating limits depends to the current supplied from the intrinsically safe barrier.

In the diagram are reported the operating limits using Y-BXNE 412 002 :

supply current 80mA (for coil resistance 157Ω)
supply current 100mA (for coil resistance 108Ω)

configuration	2A	2C	3A	3C
Diagram	1	1	2	3

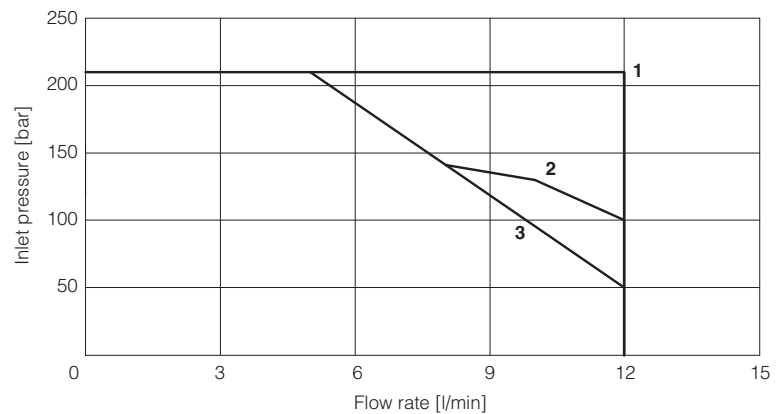

11 SWITCHING TIME

Q = 10 l/min P = 100 bar

Configuration	2A	2C	3A	3C
Switch-on (ms)	185	230	270	260
Switch-off (ms)	265	350	260	420

12 INTERNAL LEAKAGES

DLWH internal leakages based on mineral oil ISO VG 46 at 50°C

less than 5 drops/min (0,36 cm³/min) at max pressure.

13 INTRINSICALLY SAFE BARRIERS - see tech. table **GX010**

Intrinsically safe valves must be powered through safety barriers certified according to Ex-i protection mode, limiting the energy to the solenoid.

To select the proper intrinsically safe barriers following data must be considered:

- 1) V_{max} and I_{max} of the solenoid as specified in section 11 must not be exceeded also in fault conditions;
- 2) For proper operation, the minimum supply current value must be provided.

The barriers type **Y-BXNE 412** are galvanically isolated electronic devices, complying with European Norms EN60079-0/06, EN60079-11/07 and ATEX certified according to protection mode Ex ia IIC.

The barriers Y-BXNE-412 are double channel type, suitable to operate valves with double or single solenoid. Two single solenoid valves can be connected to the barrier (one to each channel) but they cannot be contemporary operated.

MODEL CODE OF I.S. BARRIER

Y-BXNE 412 00

Supply voltage

E = 110/230 VAC

2 = 24÷48 VDC

14 INSTALLATION DIMENSIONS [mm]

DLWH-2A, DLWH-2C

ISO 4401: 2005

Mounting surface: 4401-03-02-0-05
(see table P005)


Fastening bolts:

4 socket head screws M5x50 class 12.9



Tightening torque = 8 Nm

Seals: 2 OR 108


Diameter of ports P, T: Ø 7,5 mm (max)



P = PRESSURE PORT
T = USE PORT

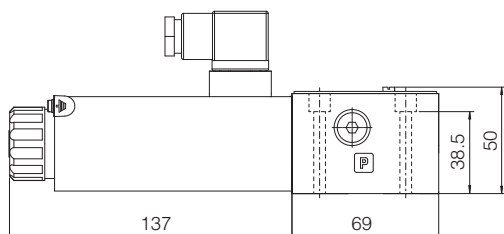

Option **/WP**

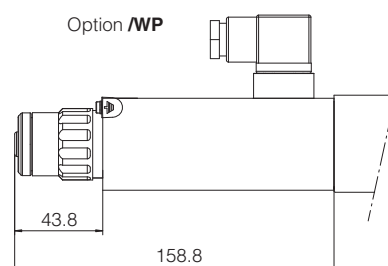

DLWH-3A, DLWH-3C

ISO 4401: 2005

Mounting surface: 4401-03-02-0-05
(see table P005)

Fastening bolts:


4 socket head screws

M5x50 class 12.9



Tightening torque = 8 Nm

Seals: 4 OR 108


Diameter of ports P, A, B, T:
Ø 7,5 mm (max)



P = PRESSURE PORT
A = USE PORT
(not used for DLWH-3C version)
B = USE PORT
(not used for DLWH-3A version)
T = TANK PORT

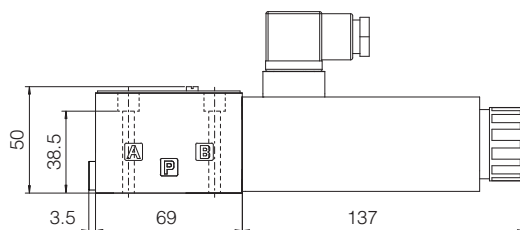

Option **/WP**

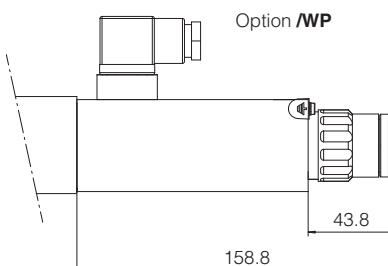

Mass [kg]	
DLWH-2*	2,6
DLWH-3*	2,6

Note: the connector is supplied with the valve

15 RELATED DOCUMENTATION

X010	Basics for electrohydraulics in hazardous environments
X050	Summary of Atos intrinsically safe components certified to ATEX or IECEx
EX950	Operating and maintenance information for intrinsically safe valves
P005	Mounting surfaces for electrohydraulic valves