


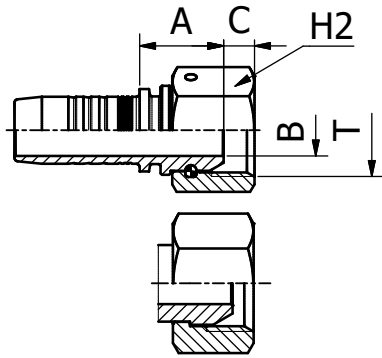


BS STANDARD CONNECTIONS

M20512/M20513

BSP FEMALE 60° CONE
BS5200 / ISO 12151-6

PART. REF.	HOSE BORE			Thread	DIMENSIONS mm							
	DN	Dash	inch		T	B	A	C	H2			
M20512-03-02	5	- 3	3/16"	1/8" - 28		3.0	16.0	4.4	14.0			
M20512-04-02	6	- 4	1/4"	1/8" - 28		3.1	16.5	4.4	14.0			
M20512-05-04	8	- 5	5/16"	1/4" - 19		4.1	17.5	4.2	19.0			
M20512-06-04	10	- 6	3/8"	1/4" - 19		4.1	18.0	4.2	19.0			
M20512-08-06	12	- 8	1/2"	3/8" - 19		7.1	21.0	6.0	22.0			
M20512-08-10	12	- 8	1/2"	5/8" - 14		12.1	22.0	10.2	28.0			
M20512-08-12	12	- 8	1/2"	3/4" - 14		15.0	24.5	9.0	32.0			
M20512-10-08	16	- 10	5/8"	1/2" - 14		9.8	24.0	6.5	27.0			
M20512-10-10	16	- 10	5/8"	5/8" - 14		12.5	21.5	10.2	28.0			
M20512-10-12	16	- 10	5/8"	3/4" - 14		15.0	23.0	9.0	32.0			
M20512-12-08	19	- 12	3/4"	1/2" - 14		9.8	25.0	6.5	27.0			
M20512-12-12	19	- 12	3/4"	3/4" - 14		15.0	24.5	9.0	32.0			
M20512-12-16	19	- 12	3/4"	1" - 11		19.8	26.0	10.5	38.0			
M20512-16-12	25	- 16	1"	3/4" - 14		15.0	25.5	9.0	32.0			
M20512-16-16	25	- 16	1"	1" - 11		19.8	27.5	10.5	38.0			
M20513-03-04	5	- 3	3/16"	1/4" - 19		4.0	16.5	5.4	19.0			
M20513-04-04	6	- 4	1/4"	1/4" - 19		4.0	17.0	5.4	19.0			
M20513-04-06	6	- 4	1/4"	3/8" - 19		7.0	19.0	6.0	22.0			
M20513-04-08	6	- 4	1/4"	1/2" - 14		9.5	19.5	6.3	27.0			
M20513-05-06	8	- 5	5/16"	3/8" - 19		7.0	19.0	6.0	22.0			
M20513-05-08	8	- 5	5/16"	1/2" - 14		9.3	20.5	6.3	27.0			
M20513-06-06	10	- 6	3/8"	3/8" - 19		7.0	19.5	6.0	22.0			
M20513-06-08	10	- 6	3/8"	1/2" - 14		9.3	20.0	6.3	27.0			
M20513-08-08	12	- 8	1/2"	1/2" - 14		9.3	20.5	6.3	27.0			

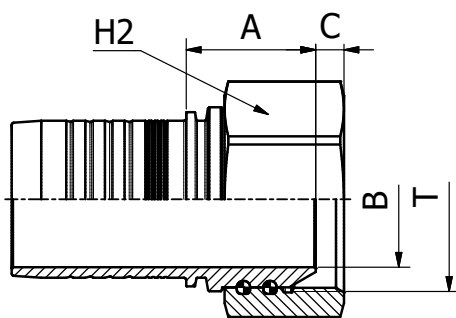

BS STANDARD CONNECTIONS

M20514

BSP FEMALE 60° CONE
BS5200 / ISO 12151-6

PART. REF.	HOSE BORE			Thread	DIMENSIONS mm							
	DN	Dash	inch		T	B	A	C	H2			
M20514-40-40	63	- 40	2.1/2"	2.1/2"		55.4	52.5	11.5	85.0			
M20514-48-48	76	- 48	3"	3"		65.0	57.0	10.9	100.0			