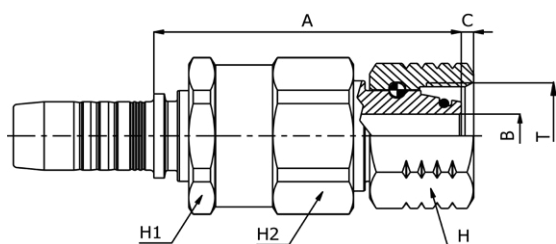
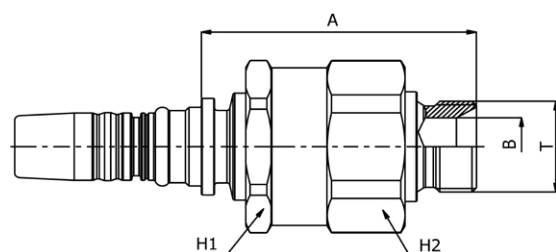


DIN STANDARD CONNECTIONS


MR21612
**METRIC O-RING FEMALE 24° CONE HEAVY DUTY
DIN 20066 / ISO 12151-2 (THRUST-WIRE NUT)**


PART. REF.	SIZE			THREAD	PIPE	W.P.	DIMENSIONS mm						
	DN	Dash	inch	T	mm	MPa	A	B	C	H	H1	H2	
MR21612-12-30	19	-12	3/4"	M30X2	20	35	79.8	12.5	3.2	36	41	41	

BS STANDARD CONNECTIONS


MR30510
**BSP
MALE 60° CONE SEAT
BS5200**

PART. REF.	SIZE			THREAD	W.P.	DIMENSIONS mm							
	DN	Dash	inch	T	MPa	A	B	H1	H2				
MR30510-12-12	19	-12	3/4"	3/4"-14	35	73.9	16.7	46	46				
MR30510-16-16	25	-16	1"	1"-11	35	85.7	22.2	55	55				
MR30510-20-20	31	-20	1.1/4"	1.1/4"-11	35	95.8	28.6	65	65				
MR30510-24-24	38	-24	1.1/2"	1.1/2"-11	30	109.6	33.3	75	75				

BS STANDARD CONNECTIONS

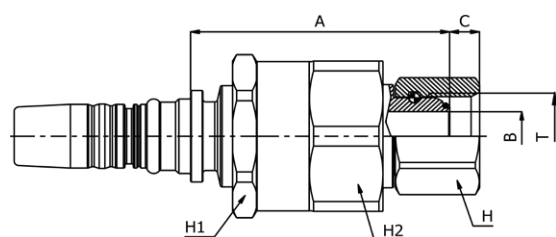
MR40812
**BSP
O-RING FEMALE 60° CONE
BS5200/ ISO 8434-6**

PART. REF.	SIZE			THREAD	W.P.	DIMENSIONS mm							
	DN	Dash	inch	T	MPa	A	B	C	H	H1	H2		
MR40812-12-12	19	-12	3/4"	3/4"-14	35	73.7	15.0	8.5	32	46	46		
MR40812-16-16	25	-16	1"	1"-11	35	83.7	19.8	10.6	41	55	55		