
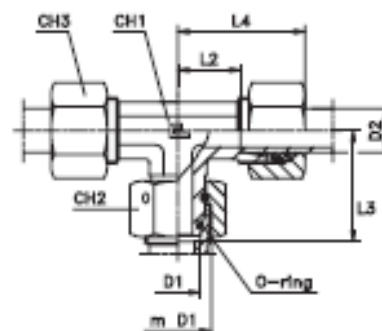
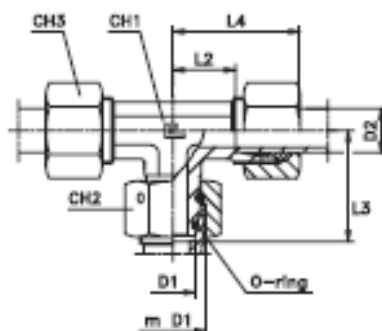


RACCORDO A TEE MASCHIO DIN/FEMMINA DIN GIREVOLE/MASCHIO DIN TIPO 6050**

Materiale: Acciaio al carbonio zincato

Normativa: DIN 2353



Serie DIN	60.... [bar]	61.... [bar]	Ordinazione Corpo	Ordinazione Completo B3	Ø Tubo		m D1	m D2	L1	L2	L3	L4	CH1	CH2	CH3	Ordinazione Completo B4
L	500	315	605004.1	605004	6	6	12x1,5	12x1,5	19	12	26	27	12	14	14	605004.4
			605005.1	605005	8	8	14x1,5	14x1,5	21	14	27,5	29	12	17	17	605005.4
			605006.1	605006	10	10	16x1,5	16x1,5	22	15	29	30	14	19	19	605006.4
	605007.1		605007	12	12	18x1,5	18x1,5	24	17	29,5	32	17	22	22	605007.4	
	605008.1		605008	15	15	22x1,5	22x1,5	28	21	32,5	36	19	27	27	605008.4	
	605009.1		605009	18	18	26x1,5	26x1,5	31	23,5	35,5	40	24	32	32	605009.4	
	605011.1	605011	28	28	36x2	36x2	38	30,5	41,5	47	36	41	41	605011.4		
	605012.1	605012	35	35	45x2	45x2	45	34,5	51,5	56	41	50	50	605012.4		
	605013.1	605013	42	42	52x2	52x2	51	40	56	63	50	60	60	605013.4		
	605015.1	605015	8	8	16x1,5	16x1,5	24	17	27,5	32	14	19	19	605015.4		
605016.1	605016	10	10	18x1,5	18x1,5	25	17,5	30,5	34	17	22	22	605016.4			
605018.1	605018	14	14	22x1,5	22x1,5	30	22	35	40	19	27	27	605018.4			
605019.1	605019	16	16	24x1,5	24x1,5	33	24,5	36,5	43	24	30	30	605019.4			
605021.1	605021	25	25	36x2	36x2	42	30	50	54	36	46	46	605021.4			
605022.1	605022	30	30	42x2	42x2	49	35,5	55,5	62	41	50	50	605022.4			
605023.1	605023	38	38	52x2	52x2	57	41	63	72	50	60	60	605023.4			
605025.1	605025	8 S	8 L	16x1,5	14x1,5	21	14	27,5	29	14	19	17	605025.4			
605026.1	605026	10 S	10 L	18x1,5	16x1,5	24	17	30	32	17	22	19	605026.4			
L/S	400	315	605027.1	605027	12 S	12 L	20x1,5	18x1,5	24	17	31	32	17	24	22	605027.4
			605028.1	605028	6 L	6 S	12x1,5	14x1,5	23	16	26	31	12	14	17	605028.4
	500		605029.1	605029	8 L	8 S	14x1,5	16x1,5	24	17	27,5	32	14	17	19	605029.4
			605030.1	605030	10 L	10 S	16x1,5	18x1,5	25	17,5	29,5	34	17	19	22	605030.4
			605031.1	605031	12 L	12 S	18x1,5	20x1,5	29	21,5	30	38	17	22	24	605031.4

Note: Desiderando ordinare il raccordo prescelto in acciaio inox, sostituire nel codice il 60.... iniziale con 61....