


NIPPLES FEMMINA GIREVOLE ORFS - MASCHIO GAS CILINDRICO CON SVASATURA - TIPO 4032**

Materiale: Acciaio al carbonio zincato

Normativa: SAE J514C

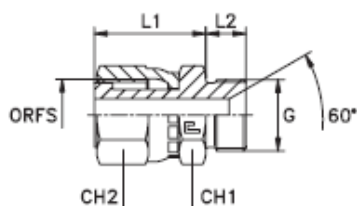

Serie ORFS	40.... [bar]	41.... [bar]	Ordinazione Completo	Ø Tubo M	Ø Tubo W	G	L1	L2	CH1	CH2	ORFS
UNIVERSALE	400	400	403201	6	1/4	1/8	23,5	8	17	19	9/16-18
			403202	8-10	5/16-3/8	1/4	27	11	19	22	11/16-16
			403203	12	1/2	3/8	30,5	12	22	24	13/16-16
	350	350	403204	14-15-16	5/8	1/2	36,5	14	27	30	1-14
	315	315	403205	18-20	3/4	3/4	40,5	16	32	36	13/16-12
	250	250	403206	22-25	7/8-1	1	43	19	41	46	17/16-12
	200	200	403207	28-30-32	1 1/4	1 1/4	45	20	46	50	1 11/16-12
	160	160	403208	35-38	1 1/2	1 1/2	46,5	23	55	60	2-12
	400	400	403209	6	1/4	1/4	23,5	11	17	19	9/16-18
			403210	6	1/4	3/8	23,5	12	17	19	9/16-18
			403211	8-10	5/16-3/8	3/8	27	12	19	22	11/16-16
	350	350	403212	8-10	5/16-3/8	1/2	27,5	14	22	22	11/16-16
	400	400	403213	12	1/2	1/4	30,5	11	22	24	13/16-16
	350	350	403214	12	1/2	1/2	30,5	14	22	24	13/16-16
	315	315	403215	12	1/2	3/4	32,5	16	27	24	13/16-16
	400	400	403216	14-15-16	5/8	3/8	36,5	12	27	30	1-14
	350	350	403217	14-15-16	5/8	5/8	36,5	16	27	30	1-14
	315	315	403218	14-15-16	5/8	3/4	36,5	16	27	30	1-14
	350	350	403219	18-20	3/4	1/2	40,5	14	32	36	13/16-12
	250	250	403220	18-20	3/4	1	40,5	19	36	36	13/16-12
	315	315	403221	22-25	7/8-1	3/4	43	16	41	46	17/16-12
	200	200	403222	22-25	7/8-1	1 1/4	45	20	46	46	17/16-12

Note: Desiderando ordinare il raccordo prescelto in acciaio inox, sostituire nel codice il 40.... iniziale con 41.... .